
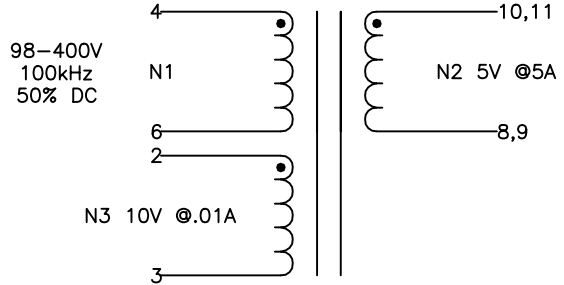
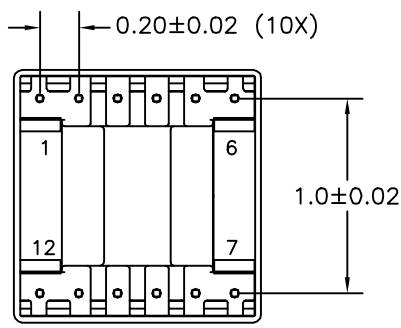
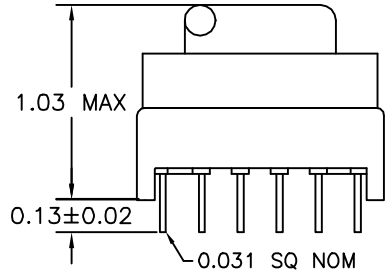


1 2 3 4 5 6

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

A  
B  
C  
D  
E  
F  
G  
H  
I  
J

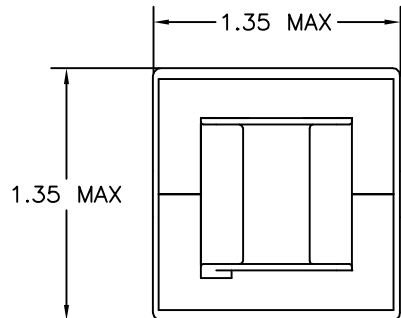

**ELECTRICAL SPECIFICATIONS**  
 L @ 1kHz .1V - (4-6) 361μH ±10%  
 LL @ 100kHz .1V - (4-6) 10.7μH TYP, TOL TBD  
 (WITH 2,3,8-11 SHORTED)

URNS RATIO - ±3%  
 N1:N2 - 1:0.049  
 N1:N3 - 1:0.098

DCR - OHMS TYP, TOL TBD  
 N1 - 0.322  
 N2 - 0.003  
 N3 - 0.050

HIPOT - 3750VAC 1MIN OR 4000VAC 1SEC  
 N1,N3 TO N2

REVISION		DATE	MARKINGS	LOCATION
A	RELEASED	12/20/01	CRAMER EIA DATE CODE CVP 45-006	PIN RAIL SIDE OF CORE
B	N3 TURNS RATIO WAS 1:0.122 UPDATED ELECTRICALS	01/08/02	DESCRIPTION 27 VA BIAS FLYBACK XFMR	TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMALS ±.010 3 PLACE DECIMALS ±.005 FRACTIONS ±1/64 ANGLES ±1/2°
			CUSTOMER	PROPRIETARY INFORMATION PROPERTY OF CRAMER COIL & TRANSFORMER CO. DUPLICATION AND/OR DISTRIBUTION BY PERMISSION ONLY
			G:\DATA\SPECS\ENG\CVP\45-006	CUSTOMER PART NUMBER
			DR. MEC	REV
			DATE 12/20/01	CRAMER PART NUMBER
			APPD. JDB	REV B
			DATE 12/21/01	CVP 45-006

1 2 3 4 5 6